

# Technoport Outdoor

Robust entrance and exit system for outdoor use



# Technoport Outdoor

*Robust entrance and exit system for outdoor use*

- > *All-rounder in the area of customer flow control and reduction of inventory losses*
- > *The optional swivel range monitor detects obstacles and stops the swivel arm*
- > *Open interface for simple control tasks*



**TECHNOPORT OUTDOOR**  
Double system with after-run

## *Whatever the weather*



A reliable gate for outdoor use in all seasons

# Technoport Outdoor

wanzl connect ready!

■ **The Technoport family is growing.** Now the system no longer needs to be protected from wind and weather. Technoport Outdoor can be used in all kinds of outdoor areas. Whether in DIY stores or garden centres, storage areas, leisure parks, swimming pools or outdoor catering, the system works in all unroofed areas. It can, of course, also be used indoors.

## Technology

- Standard return flow sensor system
- Connection option with relay contact for external devices as standard
- NEMA3 RX / IP44 certified
- Software-based configuration of system-related parameters such as braking force adjustment, motor control, etc.
- Universal and future-proof system for implementing a wide range of applications

## Technoport Outdoor uprights



**23.42094.09-0000**  
Double uprights

**23.42092.09-0000**  
Single upright, right-opening

**23.42093.09-0000**  
Single upright, left-opening

## Swivel arm

- 23.53501.09-0000**  
680 x 250 mm Technoport Outdoor
- 23.53502.09-0000**  
850 x 250 mm Technoport Outdoor
- 23.53503.09-0000**  
915 x 250 mm Technoport Outdoor
- 23.53504.09-0000**  
980 x 250 mm Technoport Outdoor

## Technoport Outdoor systems



**23.42097.09-0000**  
Double system with after-run


**23.42095.09-0000**  
Single system, right-opening with after-run

**23.42096.09-0000**  
Single system, left-opening with after-run

## Accessories

- 98.76304.00-0000**  
Control panel for individual release, permanently open and open in the opposite direction with 40 m cable
- 98.78014.00-0000**  
Weni Control Outdoor for controlling via a network


## Technoport Outdoor with swivel range monitor

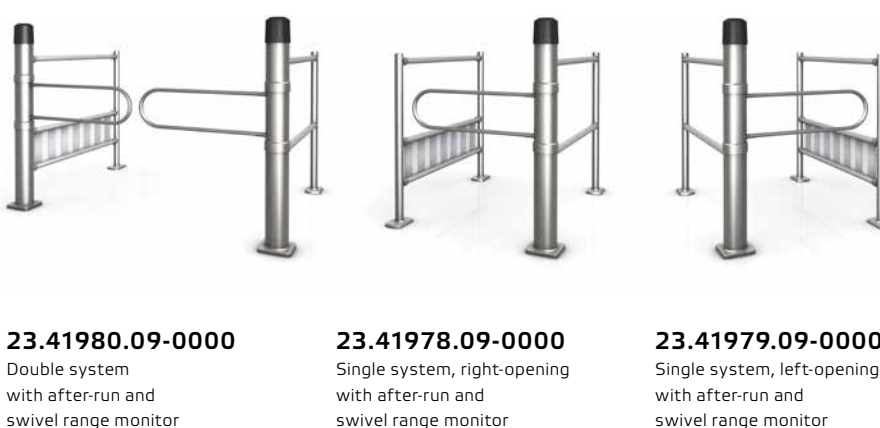

**23.41980.09-0000**  
Double system with after-run and swivel range monitor

**23.41978.09-0000**  
Single system, right-opening with after-run and swivel range monitor

**23.41979.09-0000**  
Single system, left-opening with after-run and swivel range monitor

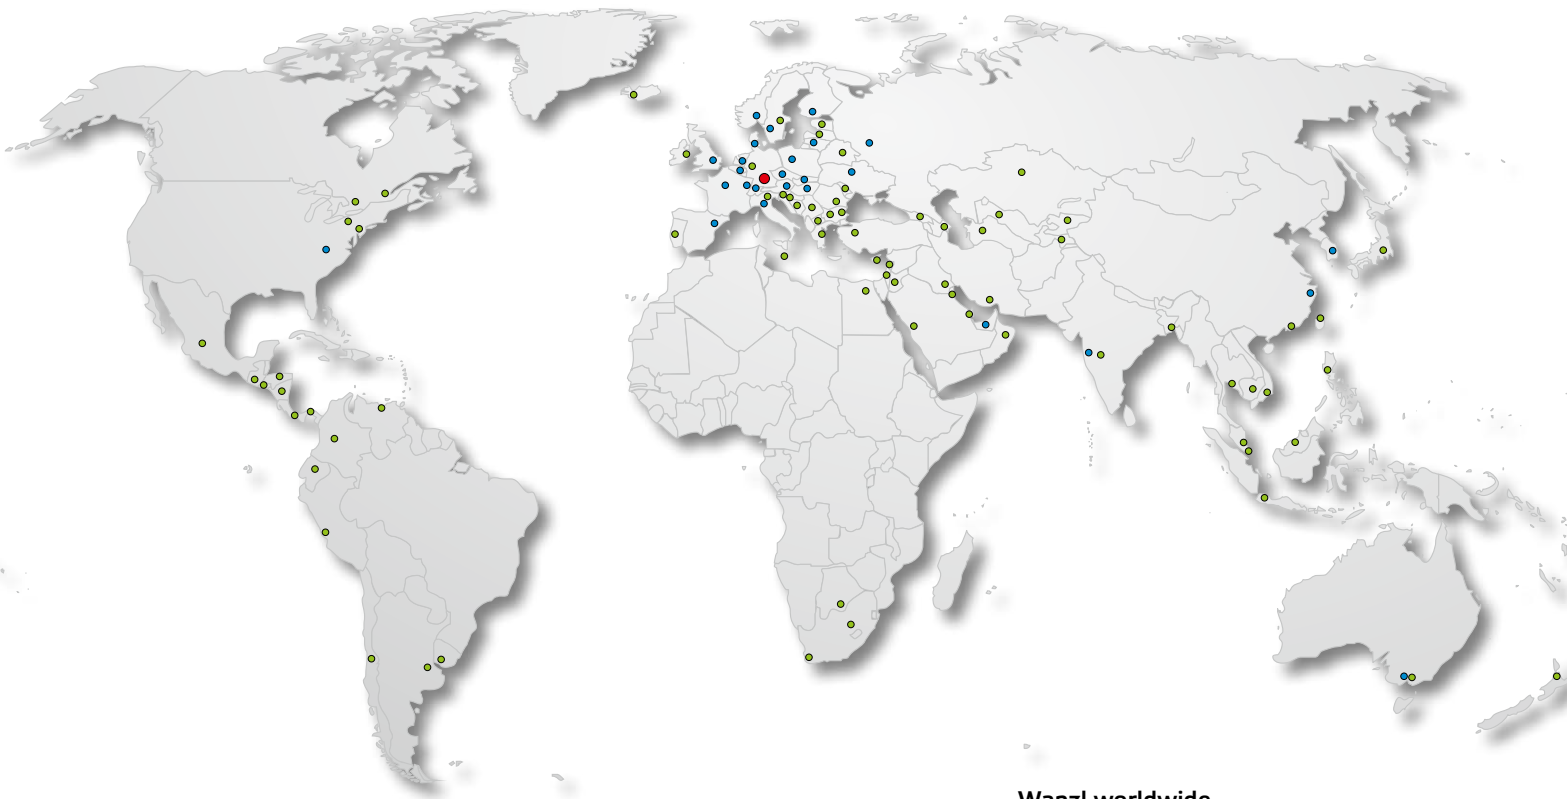

## Wanzl worldwide

- Head Office
- Subsidiaries
- Partners



### GERMANY

Wanzl GmbH & Co. KGaA  
Rudolf-Wanzl-Straße 4  
89340 Leipheim

Phone +49 (0) 82 21 / 729-0  
Fax +49 (0) 82 21 / 729-1000

info@wanzl.com  
www.wanzl.com

### GREAT BRITAIN

Wanzl Ltd.  
Europa House  
Heathcote Lane  
Warwick CV34 6SP

Phone +44 (0) 1926 / 45 1951  
Fax +44 (0) 1926 / 45 1952

enquiries@wanzl.co.uk  
www.wanzl.com

### AUSTRALIA

Wanzl Australia Pty. Ltd.  
97 Highbury Road  
BURWOOD VIC 3125

Phone +61 (0) 3 / 98 08 22 99  
Fax +61 (0) 3 / 98 08 22 66

info.au@wanzl.com  
www.wanzl.com